
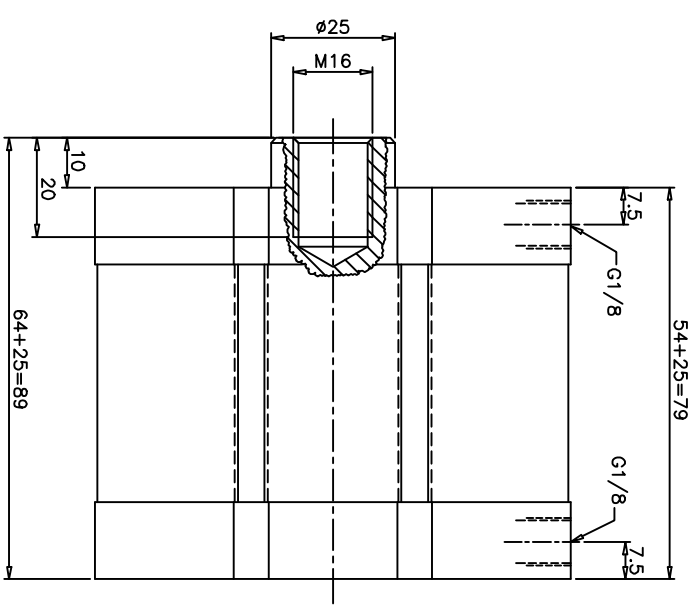


REVISIONS

SCHEDULES:

ALL DIMENSIONS ARE IN mm  
DO NOT SCALE THE DRAWING

DRG.No.  
ZNR/192080/MX

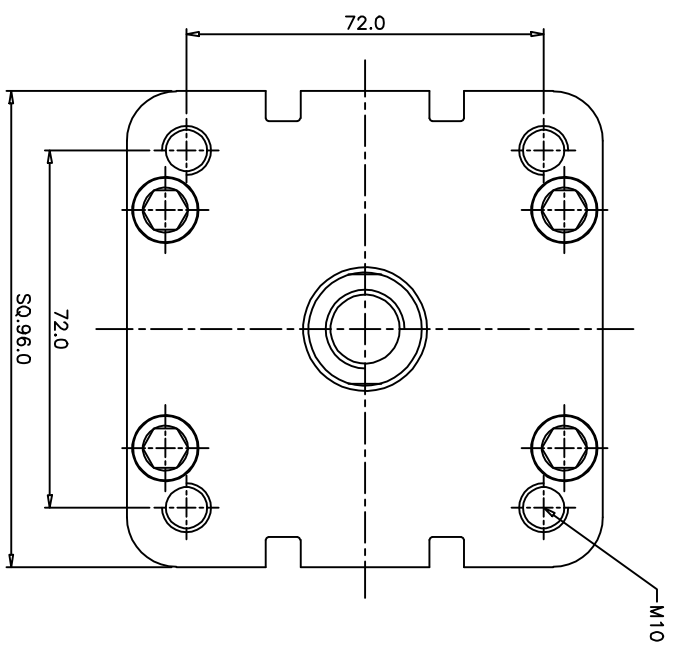

TECHNICAL DATA

- 1. CYLINDER TYPE : DOUBLE ACTING ISO/VDMA COMPACT CYLINDER
- 2. BORE DIA : 80
- 3. PISTON ROD DIA : 25
- 4. STROKE : 25
- 5. OPERATING PRESSURE : 1 to 10 bar
- 6. OPERATING TEMP.MAX. : -5°C + 80°C

MATERIAL OF CONSTRUCTION

- 1. END COVERS,PISTON : ANODISED ALUMINIUM ALLOY
- 2. BARREL : ANODISED ALUMINIUM ALLOY
- 3. PISTON ROD : STAINLESS STEEL (MARTENSITIC)
- 4. PISTON ROD SEALS : POLYURETHENE
- 5. PISTON SEALS & O-RINGS : NITRILE RUBBER

**NUCON INDUSTRIES PRIVATE LIMITED**

ASSEMBLY:		DRAWN		V.VINAY		19.11.2008	
80 mm BORE 25mm STROKE COMPACT CYLINDER		CHECKED					
SCALE: 1:1		APPROVED					
TITLE:		DRG.No.		ZNR/192080/MX			
DATA SHEET		SHEET				OF	