


REVISIONS

SCHEDULES:

DRG.No.  
DATA.ZRM/21001

ALL DIMENSIONS ARE IN mm  
DO NOT SCALE THE DRAWING

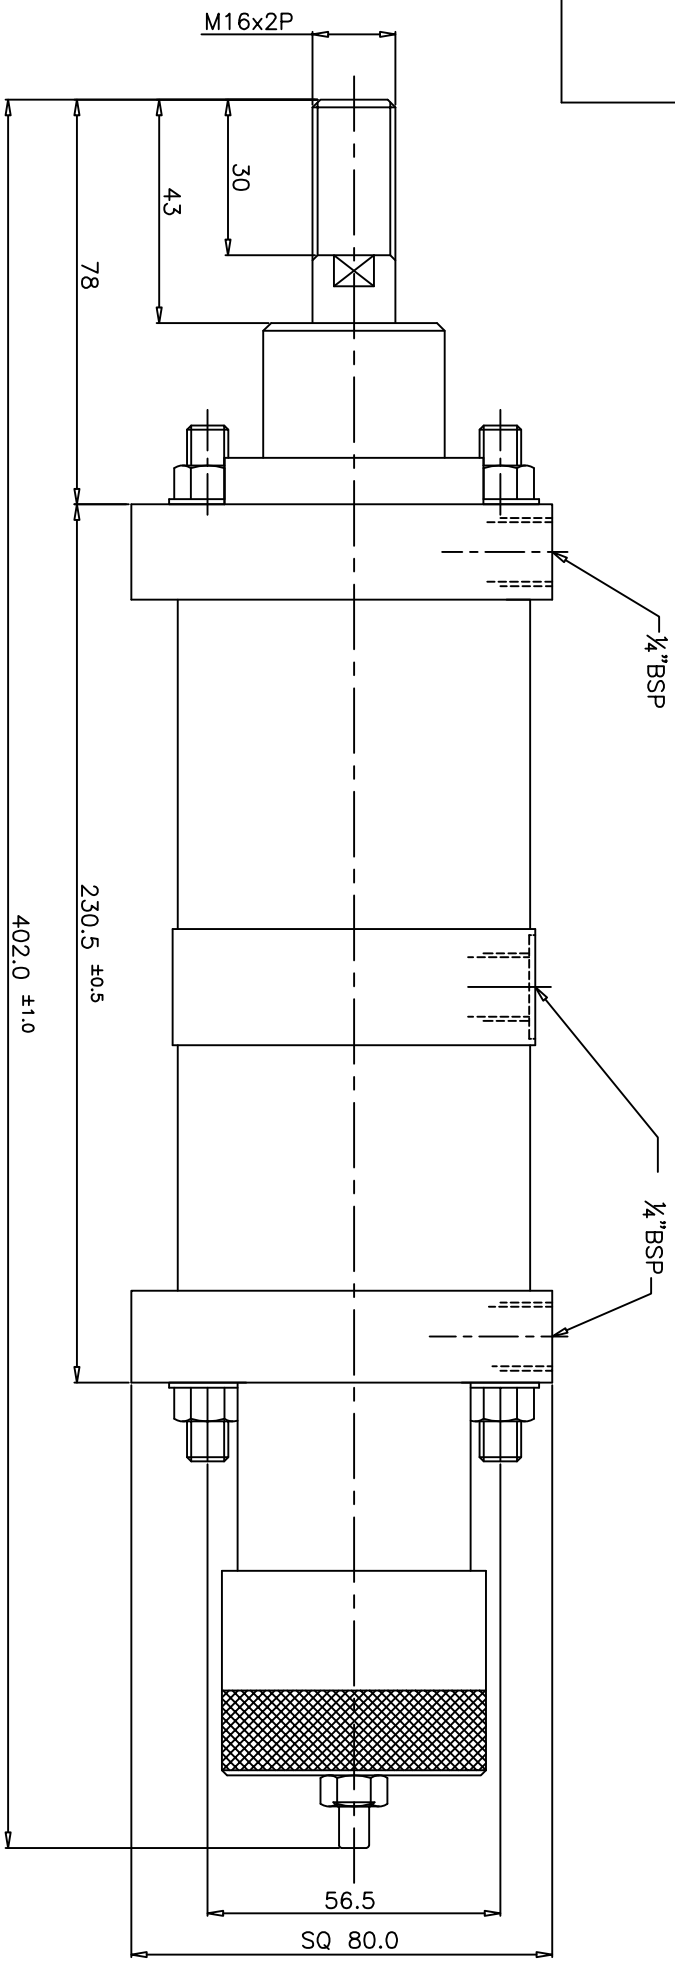

TECHNICAL DATA

1. CYLINDER TYPE : DOUBLE ACTING 3 POSITION CYLINDER
2. BORE DIA : 63
3. PISTON ROD DIA : 16
4. FULL STROKE : 60
5. ADJ. STROKE : 30
6. OPERATING PR. : 2 - 10 bar
7. OP.TEMPERATURE : 80°C max

**NUCON INDUSTRIES PRIVATE LIMITED**

ASSEMBLY: 63 mm BORE 60 mm STROKE 3 POSITION CYLINDER

SCALE:NTS	TITLE:	DRAWN	P.SAMISON	02.12.2006
	DATA SHEET	CHECKED		
		APPROVED		
		DRG.No.		
		DATA.ZRM/21001		
		SHEET		OF