


REVISIONS

SCHEDULES: ZM/940/225/D/SPL


DRG.No.
DATA.ZRM/41004

ALL DIMENSIONS ARE IN mm
DO NOT SCALE THE DRAWING

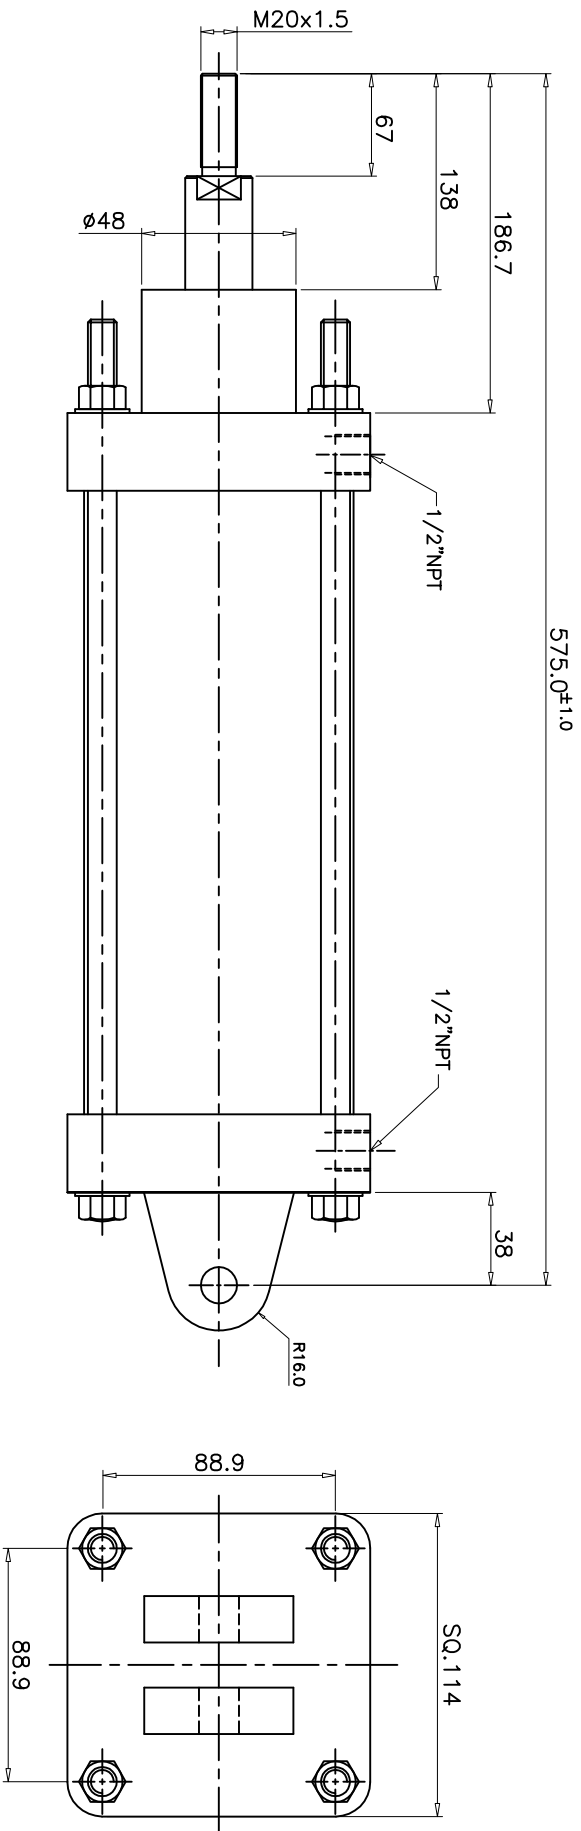

TECHNICAL DATA

- 1. CYLINDER TYPE : DOUBLE ACTING NON - CUSHIONED
- 2. BORE DIA : 4"
- 3. PISTON ROD DIA : 25.4 mm
- 4. STROKE : 225 mm
- 5. OPERATING PRESSURE : 2-10 bar
- 6. OPERATING TEMP.MAX. : + 80°C (NITRILE)
: OPTION : + 150°C (VITON)
- 7. MOUNTINGS : REAR CLEVIS MTG. STYLE-D (SPL)
(INTEGRAL REAR END COVER)

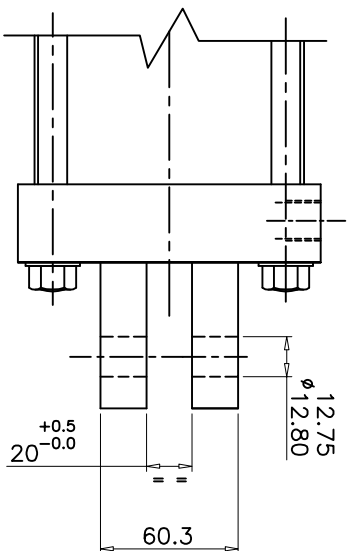

REMOVE BURRS AND SHARP CORNERS


NUCON INDUSTRIES PRIVATE LIMITED

ASSEMBLY:

100mm BORE 225mm STROKE CAST IRON NON-CUSHIONED CYLINDER

SCALE: NTS TITLE:

DATA SHEET



DRAWN	D.SATISH	08.09.2006
CHECKED		
APPROVED		
DRG.No.	DATA.ZRM/41004	
SHEET	OF	