


REVISIONS

SCHEDULES: ZM/930/160/D/SPL

ALL DIMENSIONS ARE IN mm  
DO NOT SCALE THE DRAWING

DRG.No.  
DATA.ZRM/41006

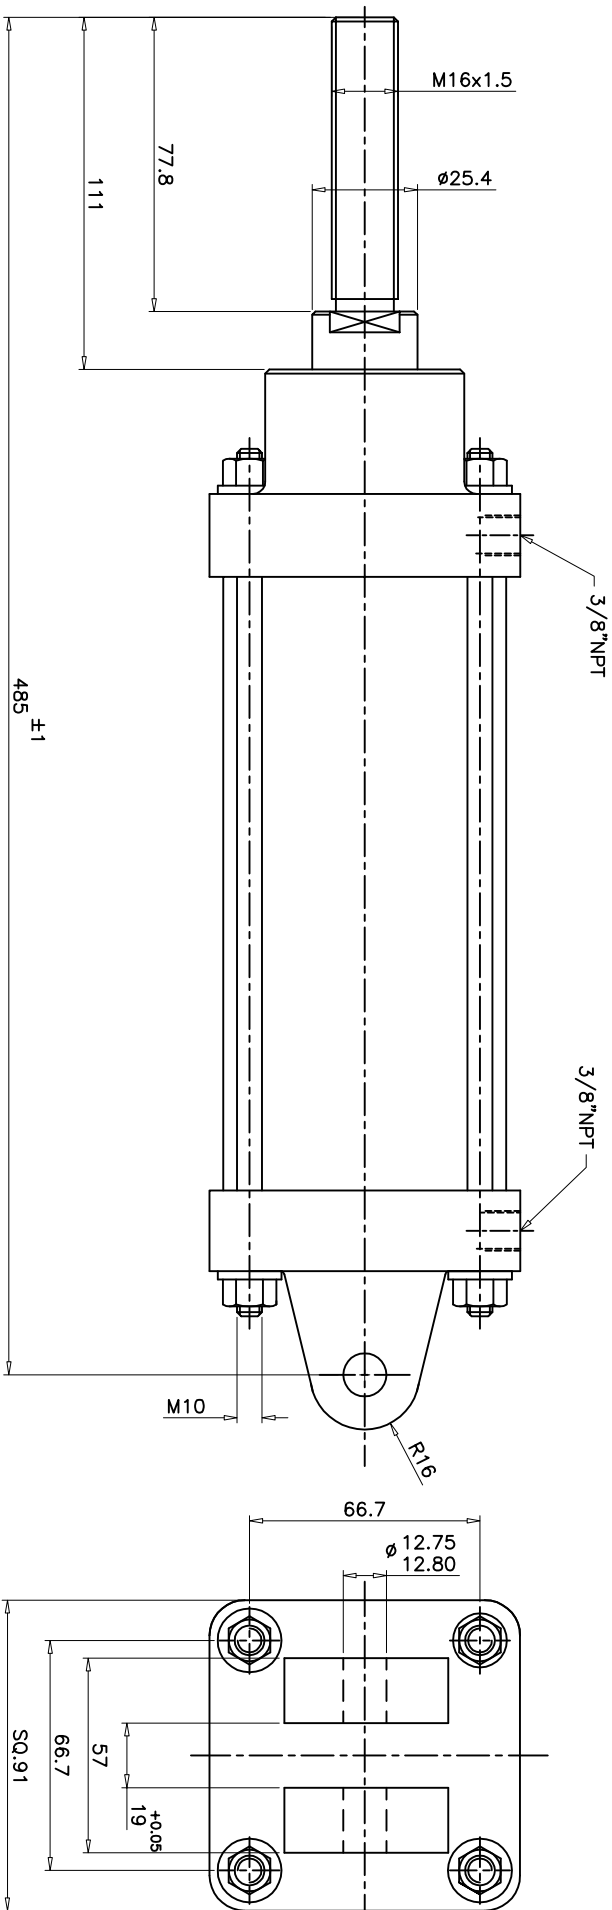

TECHNICAL DATA

- 1. CYLINDER TYPE : DOUBLE ACTING NON-CUSHIONED
- 2. BORE DIA : 3"
- 3. PISTON ROD DIA : 25.4 mm
- 4. STROKE : 160mm
- 5. OPERATING PRESSURE : 2-10 bar
- 6. OPERATING TEMP.MAX : + 80°C
- 7. MOUNTINGS : CAP(REAR) CLEVIS MTG. STYLE-D (SPL)  
(INTEGRAL REAR END COVER)

REMOVE BURRS AND SHARP CORNERS

**NUCON INDUSTRIES PRIVATE LIMITED**

ASSEMBLY:

3" BORE 160mm STROKE CAST IRON NON-CUSHIONED CYLINDER

SCALE: NTS

TITLE:

DATA SHEET



DRAWN : D.SATISH 25.08.2006

CHECKED :  
APPROVED :

DRG.No. DATA.ZRM/41006

SHEET OF