


REVISIONS

SCHEDULES: ZRM/940/190/D/SPL

DRG.No.
DATA.ZRM/41007

ALL DIMENSIONS ARE IN mm
DO NOT SCALE THE DRAWING

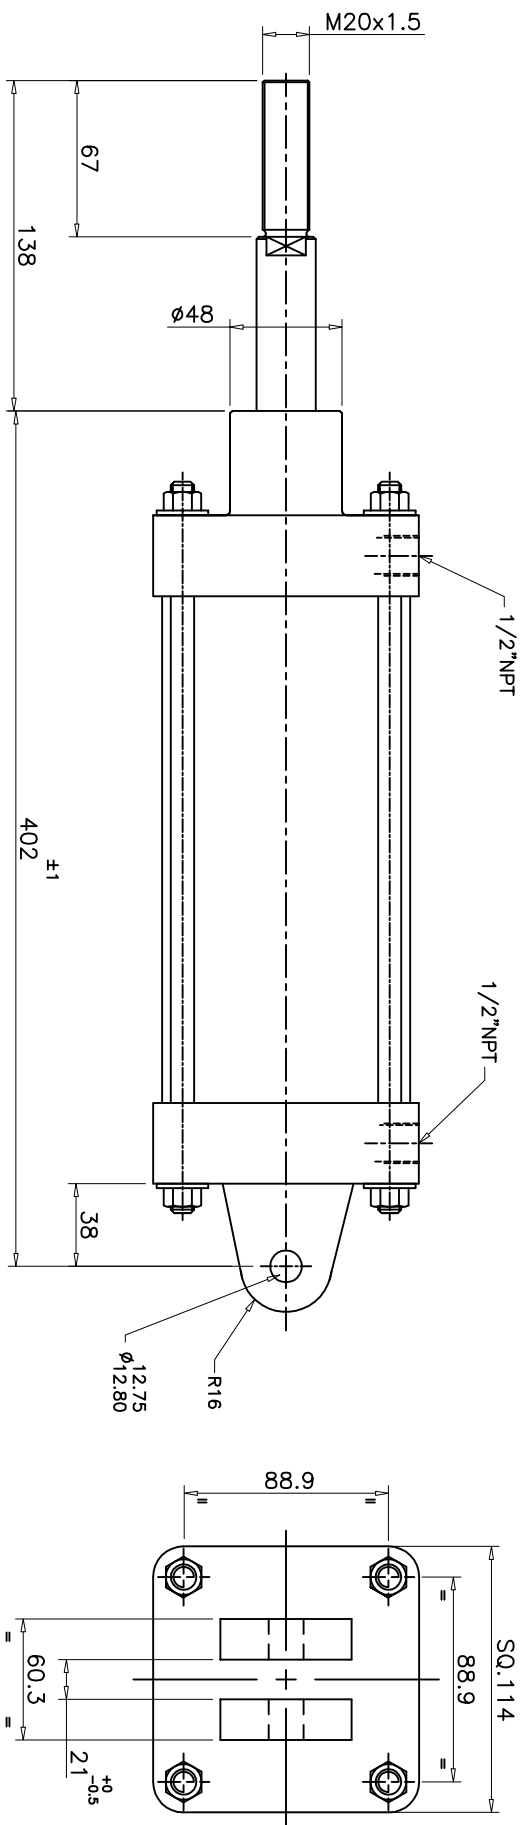

TECHNICAL DATA

- 1. CYLINDER TYPE : DOUBLE ACTING NON-CUSHIONED
- 2. BORE DIA : 4" (100mm)
- 3. PISTON ROD DIA : 25.4 mm
- 4. STROKE : 190 mm
- 5. OPERATING PRESSURE : 2-10 bar
- 6. OPERATING TEMP. MAX. : + 80°C
- 7. MOUNTINGS : REAR (CAP) CLEVIS MTC. STYLE-D (SPL)
(INTEGRAL REAR END COVER)

REMOVE BURRS AND SHARP CORNERS

NUCON INDUSTRIES PRIVATE LIMITED

ASSEMBLY:

100mm BORE 190mm STROKE CAST IRON NON-CUSHIONED CYLINDER

SCALE: NTS TITLE:

DATA SHEET



DRAWN	D.SATISH	22.09.2006
CHECKED		
APPROVED		
DRG.No.	DATA.ZRM/41007	
SHEET	OF	