| REVISIONS | SCHEDULES: M/940/225/D/SPL | DRG.No. DATA.ZRM/41013 |
|---|---|---|

ALL DIMENSIONS ARE IN mm
DO NOT SCALE THE DRAWING

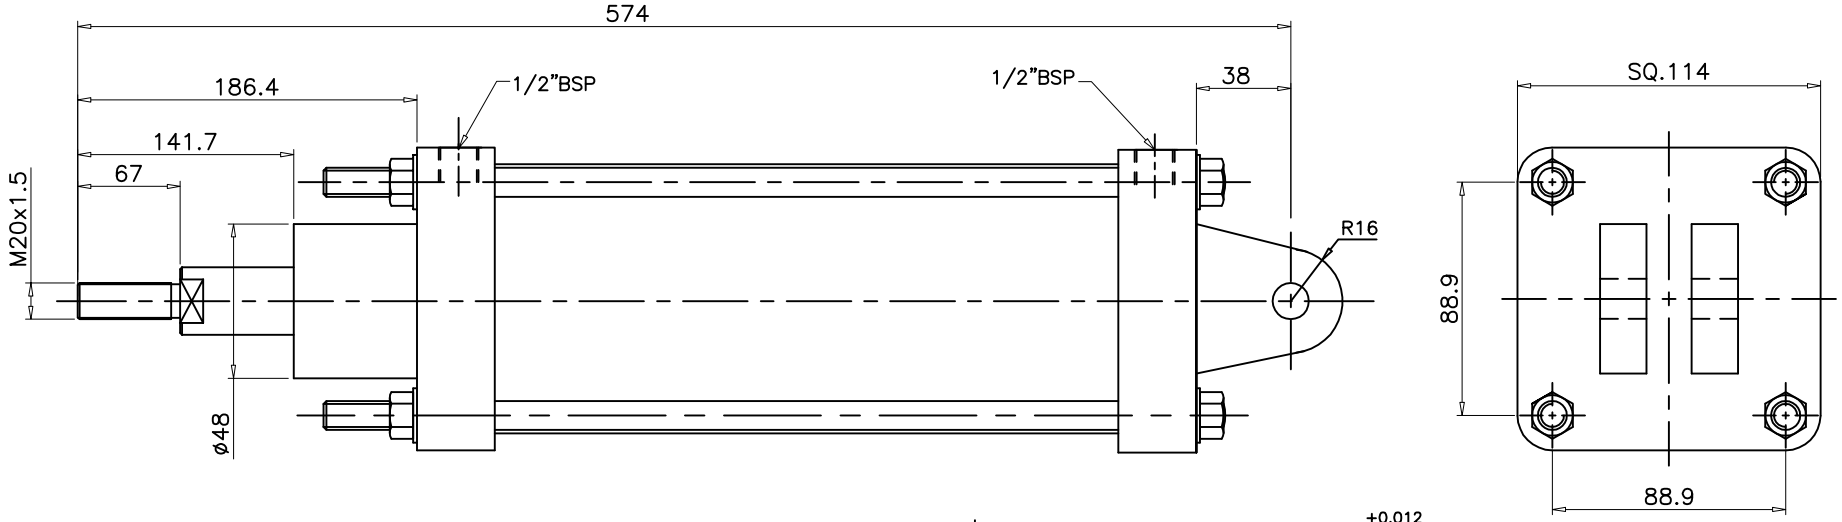


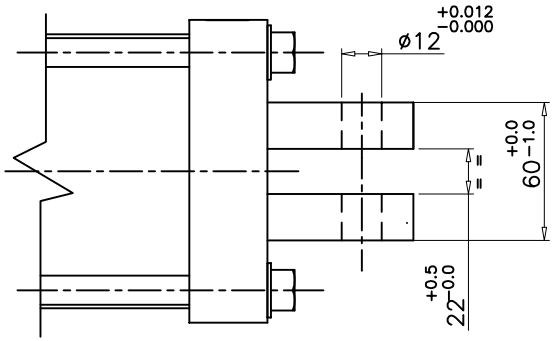


## TECHNICAL DATA

1. CYLINDER TYPE : DOUBLE ACTING NON CUSHIONED
2. BORE DIA : 4"
3. PISTON ROD DIA : 25.4 mm
4. STROKE : 225 mm
5. WORKING PRESSURE : 8Kg/cm$^2$(g)
6. TEST PRESSURE : 16Kg/cm$^2$(g)
7. OPRATING TEMP.MAX. : + 80°C
8. MOUNTINGS : REAR PIVOT MTG. STYLE–D (INTEGRAL REAR END COVER)

REMOVE BURRS AND SHARP CORNERS

# NUCON INDUSTRIES PRIVATE LIMITED

| ASSEMBLY: 100mm BORE 225mm STROKE CAST IRON NON–CUSHIONED CYLINDER | DRAWN | D.SATISH | 22.09.2006 |
|---|---|---|---|
| | CHECKED | | |
| | APPROVED | | |
| SCALE: NTS — TITLE: DATA SHEET | DRG.No. DATA.ZRM/41013 | | |
| | SHEET | | OF |