


REVISIONS

SCHEDULES:

ALL DIMENSIONS ARE IN mm  
DO NOT SCALE THE DRAWING

DRG.No.  
DATA.ZRM/43001

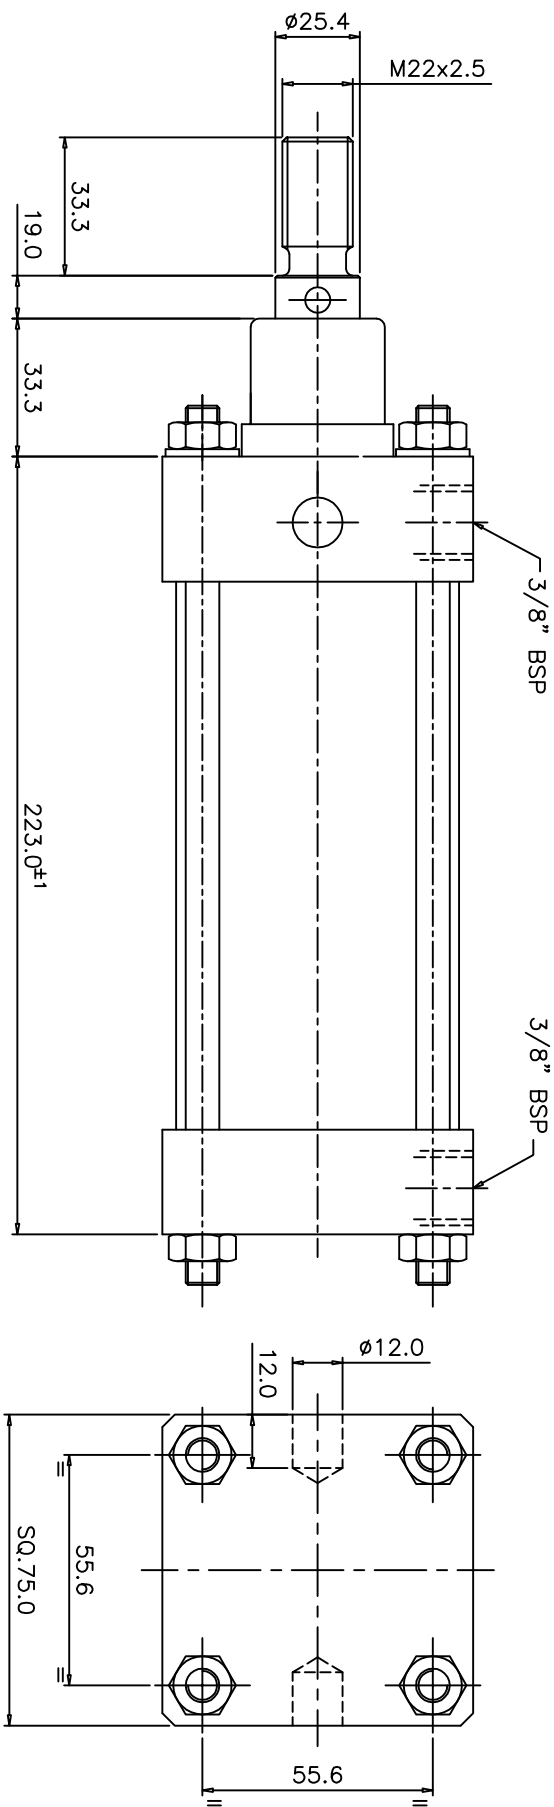

**TECHNICAL DATA**

1. TYPE : DOUBLE ACTING SPL.CYLINDER WITH BOTH ENDS CUSHIONED

- 2. BORE DIA : 63.5 (2.5")
- 3. STROKE : 123
- 4. PISTON ROD DIA : 1"
- 5. OPERATING PRESSURE : 2-10 bar
- 6. OPERATING TEMP.MAX. : + 80°C

**MATERIAL OF CONSTRUCTION**

- 1. END COVERS : MILD STEEL
- 2. PISTON : MILD STEEL
- 3. CYLINDER BARREL : CARBON STEEL
- 4. PISTON ROD : EN-8 (HARD CHROME PLATED)
- 5. TIE ROD : EN-3B
- 6. SEALS : NITRILE

**NUCON INDUSTRIES PRIVATE LIMITED**

ASSEMBLY:

2 1/2" BORE SPECIAL CYLINDER

SCALE:NTS

TITLE:

DATA SHEET

DRAWN P.SAMSON 20.11.2006

CHECKED

APPROVED

DRG.No.

DATA.ZRM/43001

SHEET

OF