REVISIONS

SCHEDULES:

DRG.No.
DATA.ZRM/60004

ALL DIMENSIONS ARE IN mm
DO NOT SCALE THE DRAWING

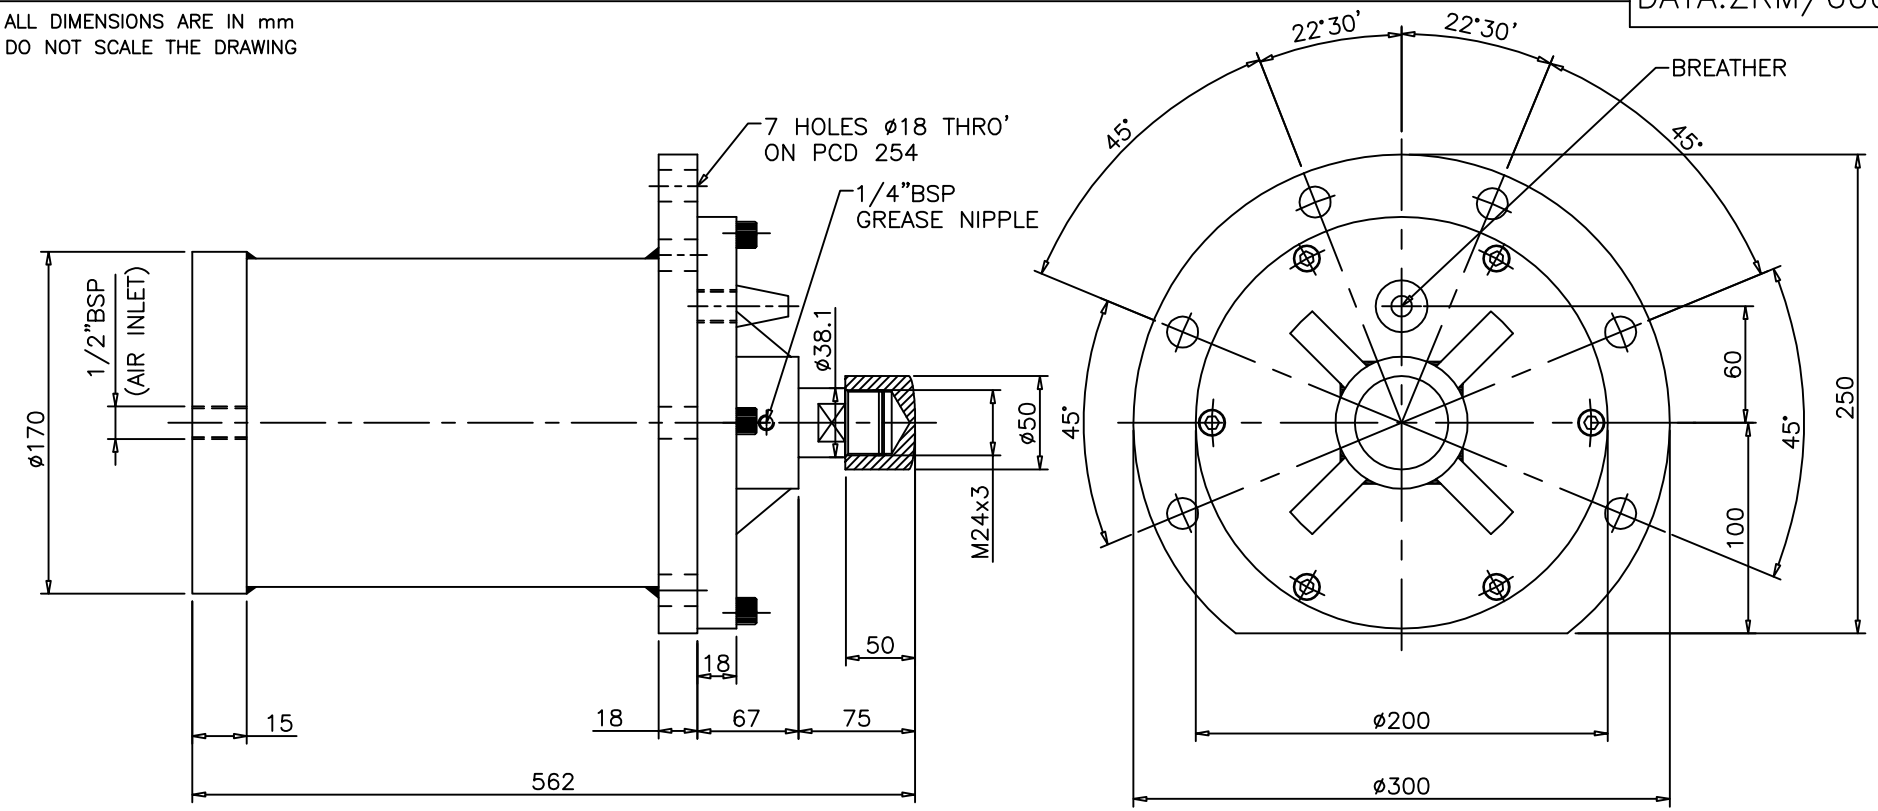


## TECHNICAL DATA

| | | |
|---|---|---|
| 1. | CYLINDER TYPE | : SINGLE ACTING NON CUSHOINED (STEEL BARREL) |
| 2. | BORE DIA | : 150 |
| 3. | PISTON ROD DIA | : 38.1(EN-8 WITH HARD CHROME PLATED) |
| 4. | STROKE | : 355 |
| 5. | OPERATING PRESSURE | : 2-10Kg/Cm2 |
| 6. | WORKING PRESSURE | : 5Kg/Cm2 |
| 7. | OPERATING TEMP.MAX. | : + 150 °C |
| 8. | SEALS | : VITON |
| 9. | MOUNTING | : FRONT FLANGE MTG.(SPL) |

REMOVE BURRS AND SHARP CORNERS

# NUCON INDUSTRIES PRIVATE LIMITED

ASSEMBLY:
150mm BORE 355mm STROKE WELDED CONSTRUCTION NON CUSHIONED CYLINDER

| | | |
|---|---|---|
| DRAWN | D.SATISH | 20.12.2006 |
| CHECKED | | |
| APPROVED | | |

SCALE: NTS

TITLE: DATA SHEET

DRG.No.
DATA.ZRM/60004

SHEET OF