REVISIONS	SCHEDULES:	DRG.No. DATA.ZKM/31005

ALL DIMENSIONS ARE IN mm
DO NOT SCALE THE DRAWING

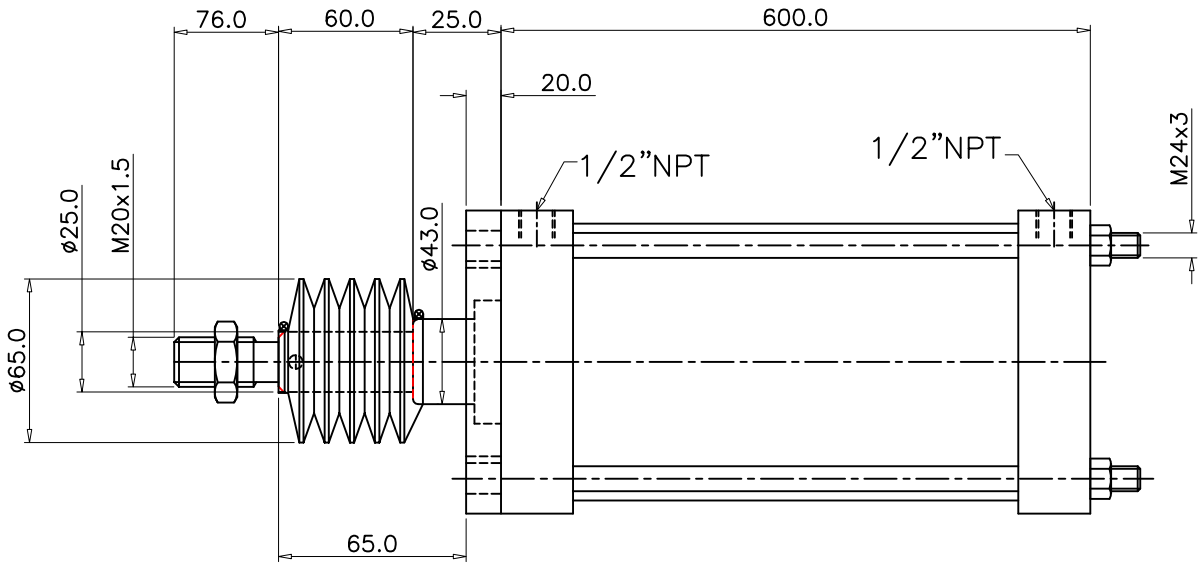

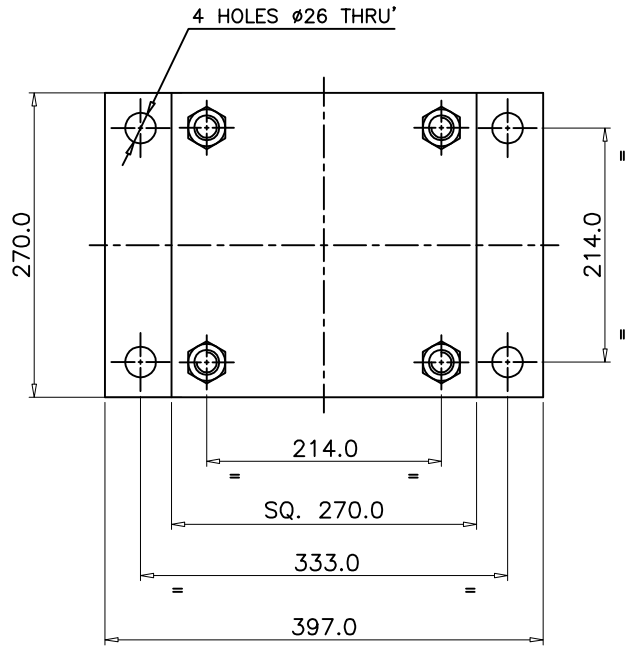

TECHNICAL DATA

1. CYLINDER TYPE	:	DOUBLE ACTING NON CUSHIONED
2. CYL. BORE DIA	:	10" (254.0)
3. STROKE	:	435
4. PISTON ROD DIA	:	25
5. OPERATING PRESSURE	:	2–10 bar
6. OPERATING TEMP. MAX.	:	+80 °C
7. MOUNTINGS	:	FRONT FLANGE MTG. STYLE–G (SPL.)

REMOVE BURRS AND SHARP CORNERS

NUCON INDUSTRIES PRIVATE LIMITED

ASSEMBLY:			
10" BORE 435mm STROKE NON–CUSHIONED SPL. CYLINDER	DRAWN	D.SATISH	20.10.2006
	CHECKED		
	APPROVED		

SCALE: NTS	TITLE:	DRG.No.
	DATA SHEET	DATA.ZKM/31005
		SHEET OF