


3/2 ELECTRICALLY ACTUATED VALVE

ZM/48


Miniature Solenoid models
Normally closed type
Sub-base mounted

Port Size : M5
Operating Pressure : 0 - 10 bar
Operating Temp. : Supply Air -5°C +50°C max.
: Ambient +5°C +50°C max.

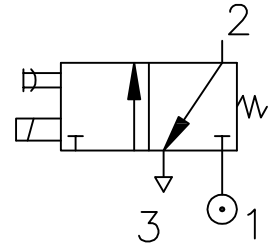

ELECTRICAL

Coil Voltage : 220-240 VAC ; 50-60Hz (Code : 137)
: 110-120 VAC ; 50-60Hz (Code : 131)
: 24 VDC (Code : 10)
Insulation : Class `H`
Protection Class : IP 65
Termal Box : 3 Pin plug to IP 65
Response Time : On 12 ms , Off 15 ms

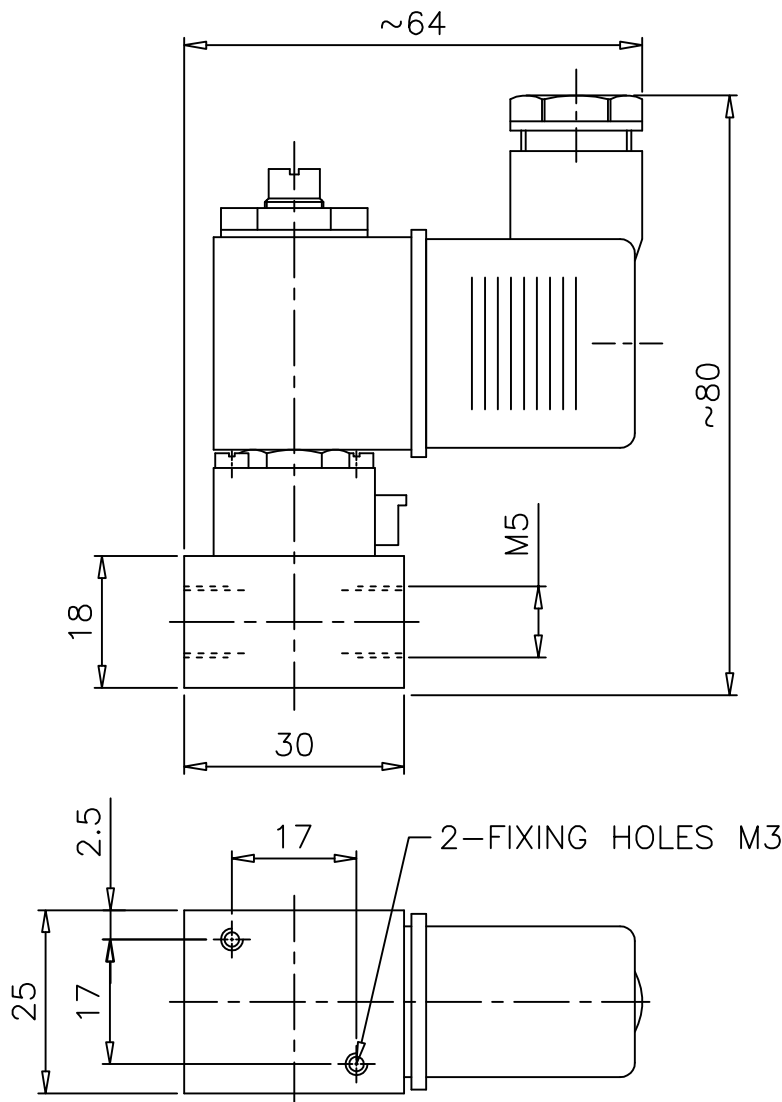

ALL DIMENSIONS ARE IN mm

NUCON ZANDER PRIVATE LIMITED
88 , C.I.E , BALANAGAR ,
HYDERABAD - 500 037

DRAWN	SREENIVAS.M	31.07.2002
CHECKED		
APPROVED		